



Test Report: LOP-500-27

500W 5"×3" Low Profile Open Frame Power Supply

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Control Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

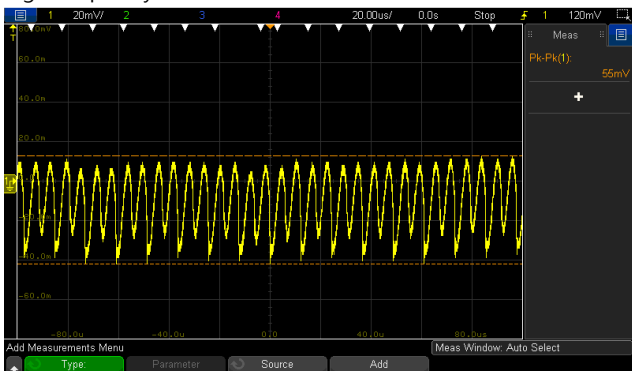
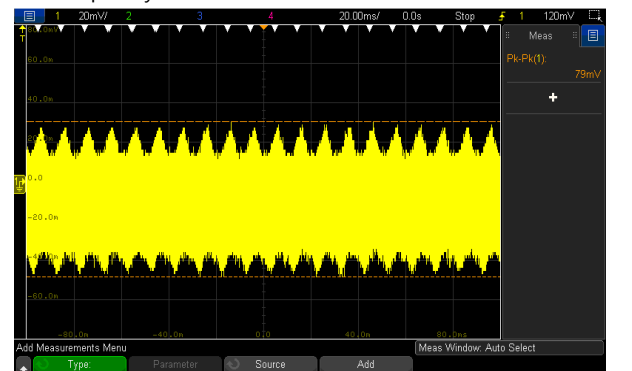
E.M.C. Test

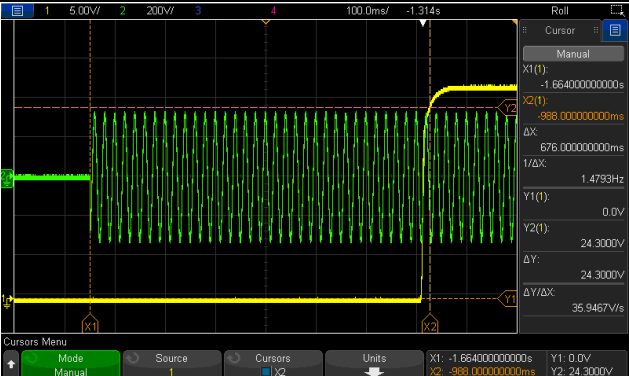
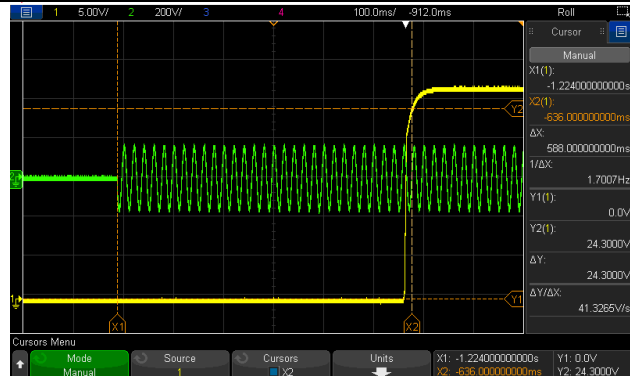
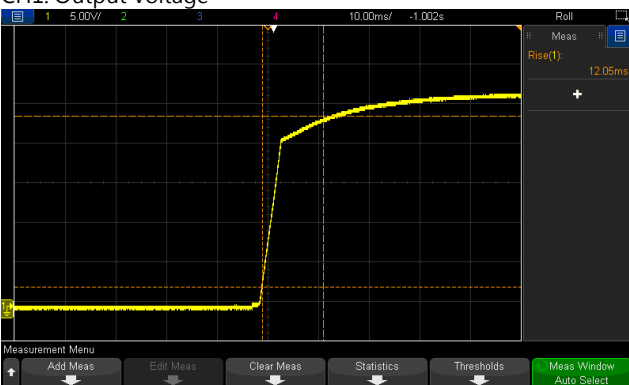
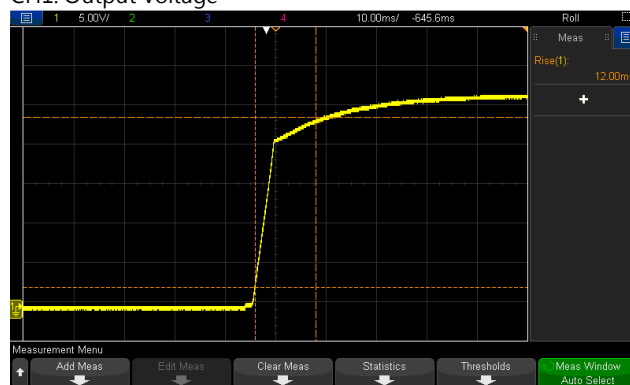
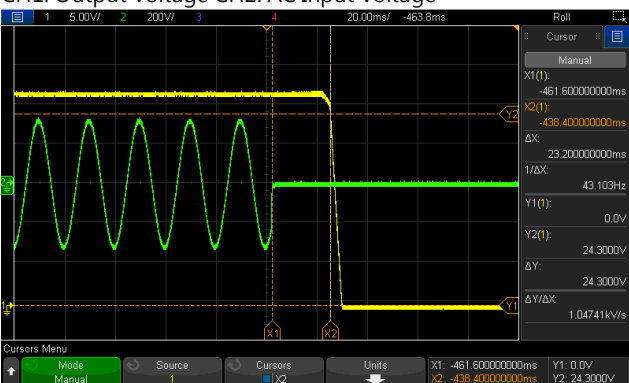
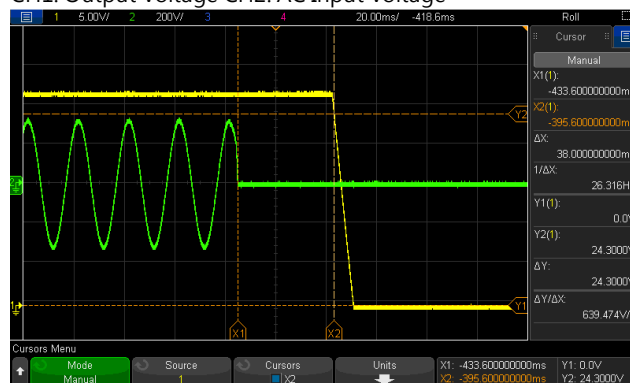
■ RELIABILITY TEST

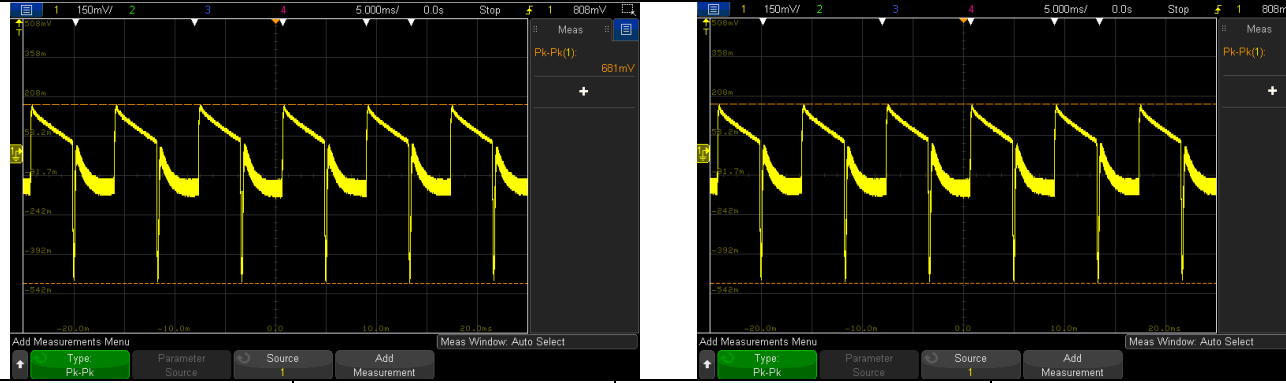
ENVIRONMENT TEST

DESIGN VERIFY TEST


OUTPUT FUNCTION TEST

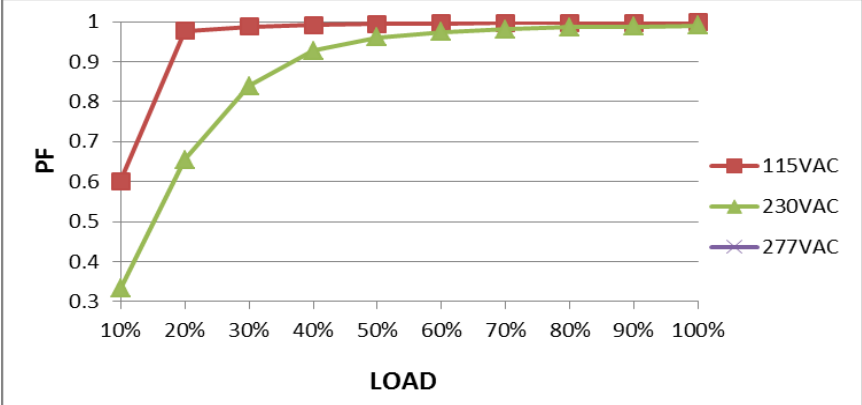
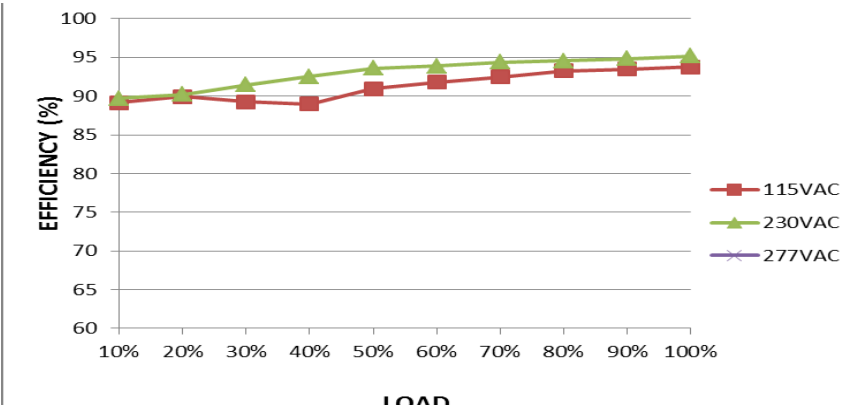
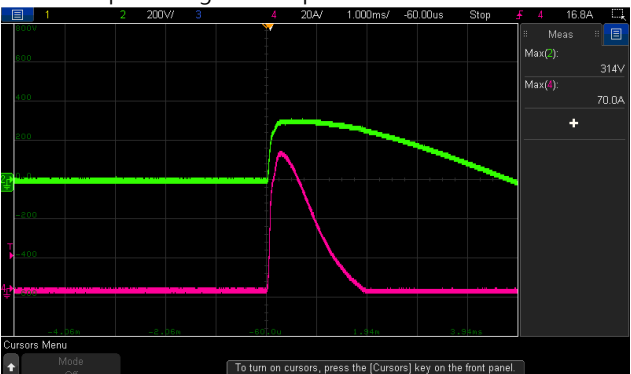
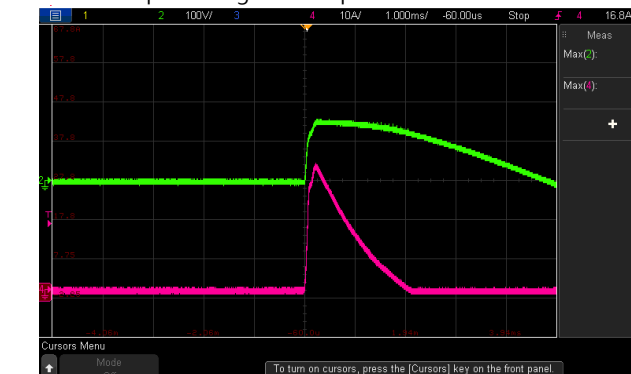
NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 25.6V~28.4V	I/P : 230 VAC I/P : 115 VAC O/P : MIN LOAD Ta : 25°C	24.84V~29.11V/230VAC 24.84V~29.11V/115VAC
2	OUTPUT VOLTAGE TOLERANCE	V1: -1% ~ +1%	I/P: 80VAC~ 264VAC O/P:FULL~ MIN. LOAD Ta:25°C	V1: -0.02 % ~0.03 %
3	LINE REGULATION	V1: -0.5% ~ +0.5%	I/P: 80VAC~ 264VAC O/P:FULL LOAD Ta:25°C	V1: 0 % ~0 %
4	LOAD REGULATION	V1: -1% ~ +1%	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25°C	V1: -0.02 % ~0.03 %
5	OVER/UNDERSHOOT TEST	<±5%	I/P: 230VAC O/P:FULL LOAD/NO LOAD Ta:25°C	1.48 %
6	RIPPLE & NOISE (Max)	V1: 200mVp-p	I/P:230VAC O/P: FULL LOAD Ta:25°C	V1: 55mVp-p / high frequency 79mVp-p / low frequency
high frequency :  low frequency : 				
7	SET UP TIME(Max)	230VAC/1000ms 115VAC/1500ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 676ms 115VAC/ 588ms
INPUT=230VAC/50HZ @ FULL LOAD CH1: Output Voltage CH2: AC Input Voltage			INPUT=115VAC/60HZ @ FULL LOAD CH1: Output Voltage CH2: AC Input Voltage	

				
8	RISE TIME (Max)	230VAC/30ms 115VAC/30ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 12.05ms 115VAC/ 12.0ms
INPUT=230VAC/50HZ @ FULL LOAD CH1: Output Voltage				
				
INPUT=115VAC/60HZ @ FULL LOAD CH1: Output Voltage				
				
9	HOLD UP TIME (Typ.)	16ms /500W load 30ms /300W load	I/P : 230 VAC O/P : TESTING Ta : 25°C	23.2ms /500W load 38ms /300W load
INPUT=230VAC/50HZ @ 400W load CH1: Output Voltage CH2: AC Input Voltage				
				
INPUT=230VAC/50HZ @ 250W load CH1: Output Voltage CH2: AC Input Voltage				
				
10	DYNAMIC LOAD	V1: 2700mVp-p	I/P: 230VAC O/P: (1) FULL/0% LOAD 50%DUTY / 120HZ (2) FULL/0% LOAD 50%DUTY / 1KHZ Ta:25°C	681mVp-p 474mVp-p
FULL /0% LOAD 50%DUTY / 120HZ				
FULL /0% LOAD 50%DUTY / 1KHZ				

				
11	TRANSIENT RECOVERY TIME	V1: 2700mVp-p < 500us	I/P: 230VAC O/P:40% LOAD CHANGE 50%DUTY/120HZ 1.25A/us	326mVp-p 0us
12	PEAK LOAD	150% PEAK LOAD@3S	I/P: 264VAC I/P: 115VAC O/P: PEAK LOAD	TEST : OK

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	80VAC~264VAC 113VDC~ 370VDC Output Derating VS Input Voltage 	(1) I/P: TESTING O/P: FULL / 70% LOAD (2) I/P: DC TESTING (L: + N: -) O/P: FULL / 70% LOAD (3) I/P: DC TESTING (L: - N: +) O/P: FULL / 70% LOAD Ta:25°C I/P: HIGH-LINE+15%=300V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	(1) 75V~264V/ FULL LOAD 75V~264V/ 70% LOAD (2) 105Vdc~370Vdc/FULL LOAD 105Vdc~370Vdc/70% LOAD (3) 105Vdc~370Vdc/FULL LOAD 105Vdc~370Vdc/70% LOAD TEST : OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P:80 VAC ~264 VAC O/P:FULL~MIN LOAD Ta:25°C	TEST : OK
3	INPUT CURRENT (Typ.)	230V/ 2.6A 115V/ 5.2A	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I =2.30A/ 230VAC I =4.79A/ 115VAC
4	LEAKAGE CURRENT	Earth leakage current <500uA(rms) @ 264VAC touch current <70uA(rms) @ 264VAC	I/P : 264 VAC/60HZ O/P : Min LOAD Ta : 25°C	278 uA / 264 VAC@ For Earth 28uA / 264 VAC@For Touch
5	NO LOAD CONSUMPTION	<0.5W	I/P : 240VAC O/P : NO LOAD Ta : 25°C	0.3W

6	POWER FACTOR (Typ.)	0.94/ 230VAC 0.98/115VAC	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	PF=0.9958/230VAC PF=0.9962/115VAC
	P.F vs LOAD 			
7	EFFICIENCY(Typ.)	94.5%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	95.16 %
	EFFICIENCY vs LOAD 			
8	INRUSH CURRENT(Typ.)	230V/80A 115V/40A COLD START	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I =70.0A/ 230VAC I =32.2A/ 115VAC T50= 880us/230V
	INPUT=230VAC/50HZ @ FULL LOAD CH2: AC Input Voltage CH4: Input current  INPUT=115VAC/ 60HZ @ FULL LOAD CH2: AC Input Voltage CH4: Input current 			

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	105%~ 150% PROTECTION TYPE : Hiccup after 3 sec, recovers automatically after fault condition is removed	I/P: 264VAC I/P: 230VAC I/P: 115VAC O/P: TESTING Ta:25°C	131.35%/ 264VAC 130.81%/ 230VAC 131.35%/ 115VAC PROTECTION TYPE : Hiccup after 3 sec, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	29.7V~35.1V Protection type: Shut down o/p voltage, re-power on to recover	I/P: 264VAC I/P: 80VAC O/P: MIN LOAD Ta:25°C	32.0V/ 264VAC 32.0V/ 80VAC Protection type: Shut down o/p voltage, re-power on to recover
3	OVER TEMPERATURE PROTECTION	Protection type: Shut down o/p voltage, recovers automatically after temperature goes down or re-power on to recover	I/P: 264VAC I/P: 80VAC O/P: FULL LOAD	O.T.P. Active Protection type : Shut down o/p voltage, recovers automatically after temperature goes down or re-power on to recover
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE Protection type: Hiccup mode, recovers automatically after fault condition is removed	I/P: 264VAC I/P: 80VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE PROTECTION TYPE : Hiccup mode, recovers automatically after fault condition is removed

CONTROL FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	EXTERNAL FAN SUPPLY	12V@0.5A for driving a fan ; tolerance -15% ~ +15% at main output 20% rated current (23CFM)	I/P: 230 VAC O/P: TESTING Ta:25°C	TEST : <u>-0.8%~0%</u>
2	REMOTE SENSE	S+ / S- The remote sensing compensates voltage drop on the load wiring up to 0.5V	I/P: 230 VAC O/P: FULL LOAD Ta:25°C	TEST : <u>OK</u>

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q2/ Q3 Rated: 22A/ 600V	AC ON/OFF I/P: High-Line +3V =267V VDS: O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz	Q2: Q3: VDS: VDS: (1) 434V (1) 426V (2) 483V (2) 450V (3) 434V (3) 430V (4) 430V (4) 430V (5) 434V (5) 426V (6) 430V (6) 430V (7) 442V (7) 442V (8) 466V (8) 450V

			(6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load (8) Peak Load Ta:25°C	
2	P.F.C Transistor (D to S) or (C to E) Peak Voltage	Q1 Rated: 34A/600V	AC ON/OFF I/P: High-Line +3V =267V VDS: O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load (8) Peak Load Ta:25°C	VDS: (1) 483V (2) 458V (3) 474V (4) 474V (5) 474V (6) 466V (7) 499V (8) 483V
3	P.F.C DIODE	D2 Rated: 6A/ 650V	I/P: High-Line +3V =267 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (4) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (5) Peak Load Ta:25°C	(1) 437V (2) 415V (3) 427V (4) 423V (5) 435V
4	Diode Peak Voltage	Q101/Q103 Rated: 120A/ 80V	AC ON/OFF I/P: High-Line +3V =267 V <u>VO=Vomax</u> O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8).NO LOAD (9) burst Mode (10) Peak Load <u>VO=Vnormal</u>	Q101: Q103: <u>VO=Vomax</u> <u>VO=Vomax</u> VDS: VDS: (1) 69.5V (1) 68.3V (2) 69.5V (2) 68.3V (3) 69.5V (3) 68.3V (4) 69.5V (4) 68.3V (5) 69.5V (5) 68.3V (6) 70.7V (6) 68.9V (7) 71.9V (7) 70.7V (8) 65.3V (8) 62.9V (9) 67.1V (9) 65.3V (10) 71.3V (10) 70.1V <u>VO=Vnormal</u> <u>VO=Vnormal</u> (1) 66.5V (1) 65.9V

			O/P: (1) Full Load Ta:25°C	
5	Input Capacitor Voltage	C5 Rated: 270μ / 420V SURGE:462V	I/P: High-Line +3V =267V O/P: (1)Full Load input on/off (2) Min load input on /Off (3) Full Load /Min load Change (4) Full load continue Ta:25°C	(1) 414V (2) 406V (3) 418V (4) 414V
6	Control IC Voltage Test	PFC /PWM IC U1: Rated : 10.4V~28.7 V O/P IC U101 Rated : 4.75V~38 V IC U103 Rated : 2V~ 7V	AC ON/OFF I/P: High-Line +3V =267 V O/P: (1) FULL LOAD (2) Output Short (3) O.L.P (4) O.V.P. (5) NO LOAD VRmin (LOW LINE) Ta:25°C	U1 (1) 18.9V (2) 18.9V (3) 18.9V (4) 18.9V (5) 18.9V U103 (1) 5.33V (2) 5.17V (3) 5.17V (4) 5.17V (5) 5.13V U101 (1) 11.60V (2) 11.44V (3) 11.44V (4) 11.55V (5) 9.35V

■ SAFETY& E.M.C. TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 4KVAC/min I/P-FG :2KVAC/min O/P-FG:1.5KVAC/min	I/P-O/P: 4.4 KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG:1.8 KVAC/min Ta:25°C	I/P-O/P: 1.760mA I/P-FG: 2.78mA O/P-FG:0.784mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 600 VDC I/P-FG: 600 VDC O/P-FG: 600 VDC Ta:25°C	I/P-O/P:50GΩ I/P-FG:50GΩ O/P-FG:50GΩ NO DAMAGE

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	BS EN/EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	PASS
2	CONDUCTION	BS EN/EN55032(CISPR32) Class I: Class B , Class II: Class A	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab

		BS EN/EN55014(CISPR32) Class I: Class B		
3	RADIATION	BS EN/EN55032(CISPR32) Class I: Class B , Class II: Class A BS EN/EN55014(CISPR32) Class I: Class B	I/P : 230 VAC (50HZ) O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	BS EN/EN61000-4-2 ■ MEDICAL AIR : 15KV / Contact : 8KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	■ CRITERIA A
5	E.F.T	BS EN/EN61000-4-4 ■ INDUSTRY INPUT : 2KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	■ CRITERIA A
6	SURGE	IEC61000-4-5 ■ INDUSTRY L-N : 2KV L,N-PE : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	■ CRITERIA A
7	Test by certified Lab & Test Report Prepare Any contradictions of the test results, please refer to the latest EMC test report			

■ RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																													
1	TEMPERATURE RISE TEST	MODEL : LOP-500-24 1. ROOM AMBIENT BURN-IN : 2 HRS I/P : 230VAC O/P : FULL LOAD 2. HIGH AMBIENT BURN-IN : 2 HRS I/P : 230VAC O/P : FULL LOAD <table><tr><th>NO</th><th>Position</th><th>ROOM AMBIENT Ta= 25 °C NO FAN</th><th>HIGH AMBIENT Ta= 45 °C NO FAN</th><th>ROOM AMBIENT Ta= 25 °C WITH FAN</th><th>HIGH AMBIENT Ta= 50 °C WITH FAN</th></tr><tr><td>1</td><td>ZNR1</td><td>46.4°C</td><td>67.9°C</td><td>28.6°C</td><td>53.6°C</td></tr><tr><td>2</td><td>C2</td><td>61.3°C</td><td>82.5°C</td><td>28.5°C</td><td>53.8°C</td></tr><tr><td>3</td><td>LF2</td><td>66.9°C</td><td>87.1°C</td><td>35.5°C</td><td>61.4°C</td></tr><tr><td>4</td><td>LF1</td><td>52.6°C</td><td>74.3°C</td><td>28.8°C</td><td>53.9°C</td></tr><tr><td>5</td><td>RTH1</td><td>65.6°C</td><td>86.2°C</td><td>30.3°C</td><td>55.8°C</td></tr><tr><td>6</td><td>BD1</td><td>71.3°C</td><td>91.2°C</td><td>42.3°C</td><td>67.9°C</td></tr><tr><td>7</td><td>C8</td><td>59.6°C</td><td>79.4°C</td><td>38.1°C</td><td>63.6°C</td></tr><tr><td>8</td><td>RY1</td><td>74.9°C</td><td>94.7°C</td><td>37.5°C</td><td>63.1°C</td></tr><tr><td>9</td><td>C60</td><td>55°C</td><td>77°C</td><td>26.5°C</td><td>51.2°C</td></tr></table>				NO	Position	ROOM AMBIENT Ta= 25 °C NO FAN	HIGH AMBIENT Ta= 45 °C NO FAN	ROOM AMBIENT Ta= 25 °C WITH FAN	HIGH AMBIENT Ta= 50 °C WITH FAN	1	ZNR1	46.4°C	67.9°C	28.6°C	53.6°C	2	C2	61.3°C	82.5°C	28.5°C	53.8°C	3	LF2	66.9°C	87.1°C	35.5°C	61.4°C	4	LF1	52.6°C	74.3°C	28.8°C	53.9°C	5	RTH1	65.6°C	86.2°C	30.3°C	55.8°C	6	BD1	71.3°C	91.2°C	42.3°C	67.9°C	7	C8	59.6°C	79.4°C	38.1°C	63.6°C	8	RY1	74.9°C	94.7°C	37.5°C	63.1°C	9	C60	55°C	77°C	26.5°C	51.2°C
NO	Position	ROOM AMBIENT Ta= 25 °C NO FAN	HIGH AMBIENT Ta= 45 °C NO FAN	ROOM AMBIENT Ta= 25 °C WITH FAN	HIGH AMBIENT Ta= 50 °C WITH FAN																																																												
1	ZNR1	46.4°C	67.9°C	28.6°C	53.6°C																																																												
2	C2	61.3°C	82.5°C	28.5°C	53.8°C																																																												
3	LF2	66.9°C	87.1°C	35.5°C	61.4°C																																																												
4	LF1	52.6°C	74.3°C	28.8°C	53.9°C																																																												
5	RTH1	65.6°C	86.2°C	30.3°C	55.8°C																																																												
6	BD1	71.3°C	91.2°C	42.3°C	67.9°C																																																												
7	C8	59.6°C	79.4°C	38.1°C	63.6°C																																																												
8	RY1	74.9°C	94.7°C	37.5°C	63.1°C																																																												
9	C60	55°C	77°C	26.5°C	51.2°C																																																												

		NO	Position	ROOM AMBIENT	HIGH AMBIENT	ROOM AMBIENT	HIGH AMBIENT
				Ta= 25 °C NO FAN	Ta= 45 °C NO FAN	Ta= 25 °C WITH FAN	Ta= 50 °C WITH FAN
		10	L1	69.8°C	89.3°C	47.4°C	73.2°C
		11	D2	71.2°C	91.1°C	47.9°C	73.7°C
		12	Q1	72.4°C	92.4°C	48.2°C	74.4°C
		13	RTH3	67.3°C	87.4°C	43.7°C	69.6°C
		14	Q3	70.1°C	90.3°C	44.8°C	71.3°C
		15	Q2	71.7°C	92°C	47.6°C	74.5°C
		16	U1	64.2°C	84.6°C	40.9°C	66.3°C
		17	RTH2	58.6°C	78.9°C	36.7°C	62°C
		18	C36	73.3°C	93.6°C	39.7°C	65.7°C
		19	C125	58.6°C	79.6°C	36.2°C	61.9°C
		20	D103	63.9°C	84.7°C	36.2°C	61.8°C
		21	T1 Coil	87.3°C	107.8°C	51.6°C	77.6°C
		22	T1 Core	79.4°C	100°C	47°C	73°C
		23	TSW1	66°C	86.6°C	37.7°C	63.7°C
		24	Q101	80.3°C	101°C	49.4°C	76.3°C
		25	Q103	79.4°C	100.2°C	45.6°C	72.3°C
		26	C103	71.8°C	92°C	38.6°C	65°C
		27	C102	69.3°C	89.5°C	38.9°C	65.2°C
		28	L100	59.4°C	79.6°C	39.7°C	66.3°C
		29	D1	51°C	71.2°C	31.9°C	56.6°C
		30	R3	64.9°C	84.8°C	38.9°C	64.1°C
		31	Q7	60.7°C	81.6°C	27.8°C	52.3°C
		32	R100	67.5°C	88.7°C	36.8°C	61.1°C
		33	U101	82.8°C	106°C	37.4°C	62.7°C
		34	RG100	54°C	74.3°C	40.3°C	65.8°C
		35	R122	56.5°C	77.1°C	35.7°C	61°C
		36	D105	55.8°C	76.9°C	34.1°C	59.4°C
		37	U4	53.1°C	73.8°C	31.8°C	56.1°C
		38	Q108	73.6°C	93.7°C	34.5°C	59.8°C
		39	R105	68.6°C	88.8°C	33°C	58.5°C
		40	C5	60.2°C	80.4°C	39.1°C	64.4°C
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)		I/P : 230 VAC O/P : 124.7%LOAD Ta : 25°C		TEST : OK	
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR		I/P : 264VAC/115VAC O/P : 100%LOAD Ta= -45°C		TEST : OK	
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50 °C/95 %R.H NO DAMAGE		I/P : 272 VAC O/P : FULL LOAD Ta= 50 °C HUMIDITY= 95 %R.H		TEST : OK	

5	TEMPERATURE COEFFICIENT	$\pm 0.03\%/^{\circ}\text{C}(0\sim 50^{\circ}\text{C})$	I/P : 230 VAC O/P : FULL LOAD	$\pm 0.006\%/^{\circ}\text{C}(0\sim 50^{\circ}\text{C})$
6	STORAGE TEMPERATURE TEST	-40~85°C	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/output condition : STATIC	
7	THERMAL SHOCK TEST	-40~50°C	1. Thermal shock Temperature : -45°C~ +55°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/output condition : 15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle:230V/ FULL LOAD Burn In Test	
8	VIBRATION TEST	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 12min/sweep cycle (4) Acceleration : 3G (5) Test Time : 180min in each axis (X.Y.Z) (6) Ta : 25°C	
9	CAPACITOR LIFE CYCLE	SUPPOSE C103 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 45 °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 45 °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 45 °C LIFE TIME		(1) 133799.6 HRS (NO FAN) (2) 32989.4 HRS (NO FAN) (3) 80474.5 HRS (NO FAN) (4) 152926.1 HRS (NO FAN)
		SUPPOSE C102 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 50 °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 50 °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 50 °C LIFE TIME		(5) 1120579.2 HRS (WITH FAN) (6) 179772.5 HRS (WITH FAN) (7) 297388.4 HRS (WITH FAN) (8) 422736.7 HRS (WITH FAN)
10	MTBF	Conducted by Parts Stress Analysis Prediction 1695.7K hrs min. Telcordia SR-332 (Bellcore) ; 230.7K hrs min. MIL-HDBK-217F (25°C)		
11	Ongoing Reliability Test	I/P : 230VAC O/P : FULL LOAD TA=50°C Demonstration Mean Time Between Failure : 30,000 hours		

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	Yuwei	Liutt	Wangdz

2020.10.1 TAG-QA-009