



Test Report: LOP-500-54

500W 5"×3" Low Profile Open Frame Power Supply

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Control Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

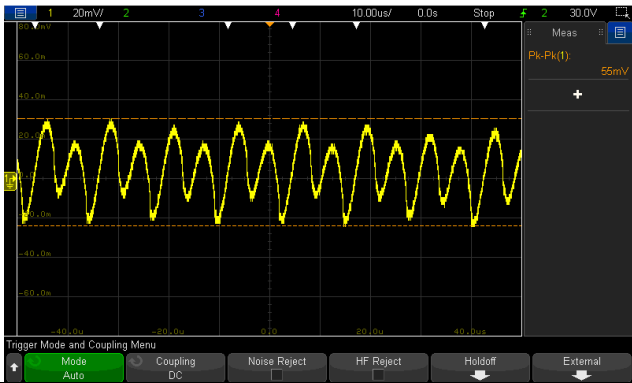
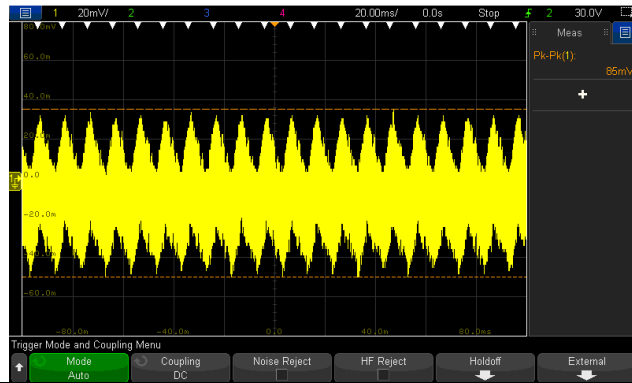
E.M.C. Test

■ RELIABILITY TEST

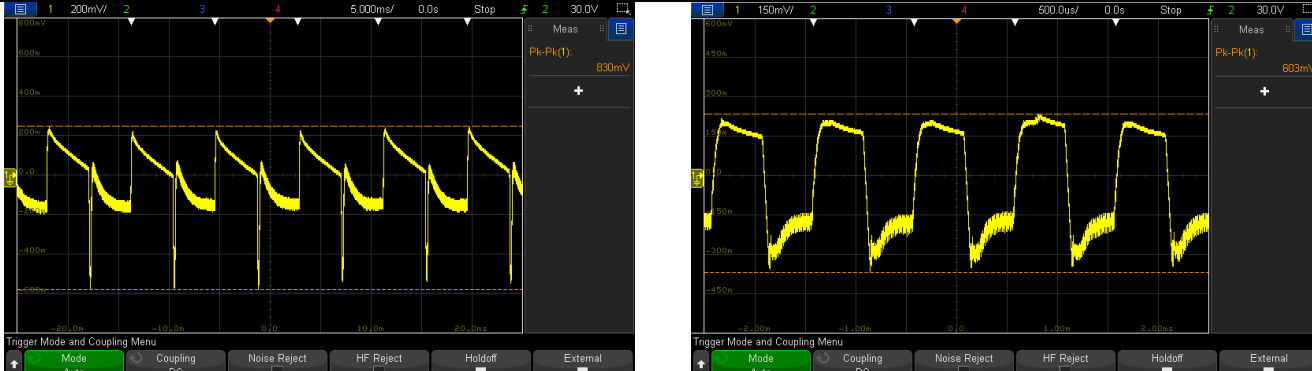
ENVIRONMENT TEST

DESIGN VERIFY TEST


OUTPUT FUNCTION TEST

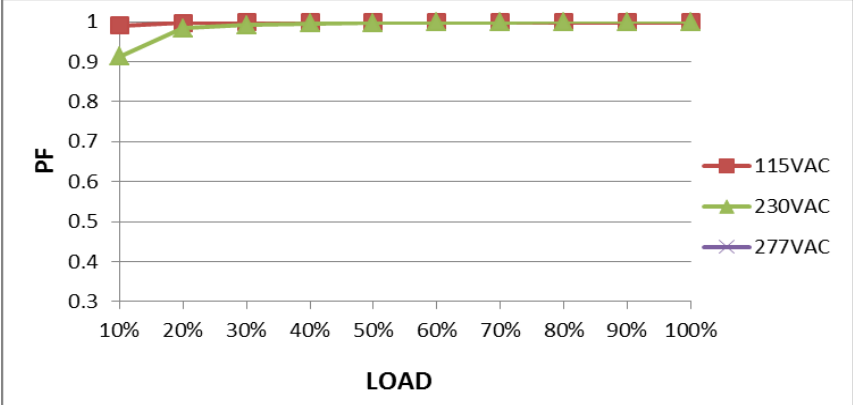
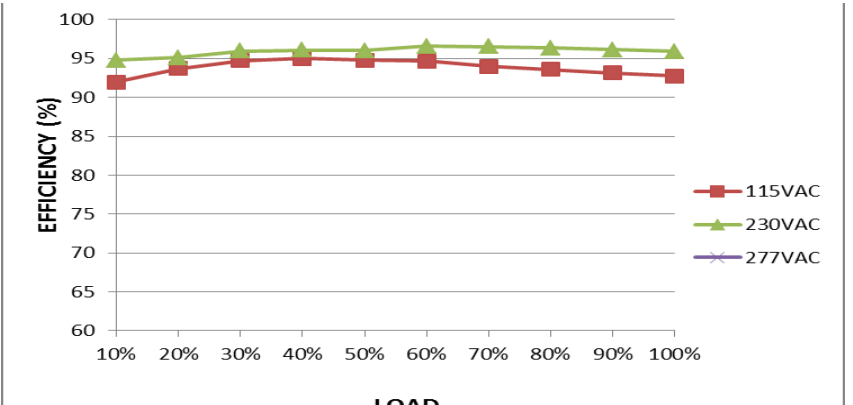
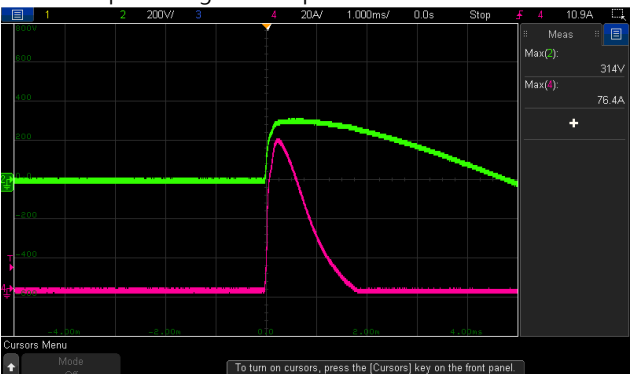
NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 52V~58V	I/P : 230 VAC I/P : 115 VAC O/P : MIN LOAD Ta : 25°C	48.91V~58.49V/230VAC 48.92V~58.49V/115VAC
2	OUTPUT VOLTAGE TOLERANCE	V1: -1% ~ +1%	I/P: 80VAC~ 264VAC O/P:FULL~ MIN. LOAD Ta:25°C	V1: -0.02% ~ 0.02%
3	LINE REGULATION	V1: -0.5% ~ +0.5%	I/P: 80VAC~ 264VAC O/P:FULL LOAD Ta:25°C	V1: 0% ~0.0%
4	LOAD REGULATION	V1: -1% ~ +1%	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25°C	V1: -0.02% ~ 0.02%
5	OVER/UNDERSHOOT TEST	<±5%	I/P: 230VAC O/P:FULL LOAD/NO LOAD Ta:25°C	1.1 %
6	RIPPLE & NOISE (Max)	V1: 250mVp-p	I/P:230VAC O/P: FULL LOAD Ta:25°C	V1: 55mVp-p / high frequency 85mVp-p / low frequency
high frequency :  low frequency : 				
7	SET UP TIME(Max)	230VAC/1000ms 115VAC/1500ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 700ms 115VAC/ 592ms
INPUT=230VAC/50HZ @ FULL LOAD CH1: Output Voltage CH2: AC Input Voltage			INPUT=115VAC/60HZ @ FULL LOAD CH1: Output Voltage CH2: AC Input Voltage	

8	RISE TIME (Max)	230VAC/30ms 115VAC/30ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 8.03ms 115VAC/ 8.13ms
INPUT=230VAC/50HZ @ FULL LOAD CH1: Output Voltage		INPUT=115VAC/60HZ @ FULL LOAD CH1: Output Voltage		
9	HOLD UP TIME (Typ.)	16ms /500W load 30ms /300W load	I/P : 230 VAC O/P : TESTING Ta : 25°C	23.6ms /500W load 35.8ms /300W load
INPUT=230VAC/50HZ @ 400W load CH1: Output Voltage CH2: AC Input Voltage		INPUT=230VAC/50HZ @ 250W load CH1: Output Voltage CH2: AC Input Voltage		
10	DYNAMIC LOAD	V1: 5400mVp-p	I/P: 230VAC O/P: (1) FULL/0% LOAD 50%DUTY / 120HZ (2) FULL/0% LOAD 50%DUTY / 1KHZ Ta:25°C	830mVp-p 603mVp-p
FULL /0% LOAD 50%DUTY / 120HZ		FULL /0% LOAD 50%DUTY / 1KHZ		

				
11	TRANSIENT RECOVERY TIME	V1: 5400mVp-p < 500us	I/P: 230VAC O/P:40% LOAD CHANGE 50%DUTY/120HZ 1.25A/us	400mVp-p 0us
12	PEAK LOAD	150% PEAK LOAD@3S	I/P: 264VAC I/P: 115VAC O/P: PEAK LOAD	TEST : OK

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	80VAC~264VAC 113VDC~ 370VDC Output Derating VS Input Voltage 	(1) I/P: TESTING O/P: FULL / 70% LOAD (2) I/P: DC TESTING (L: + N: -) O/P: FULL / 70% LOAD (3) I/P: DC TESTING (L: - N: +) O/P: FULL / 70% LOAD Ta:25°C I/P: HIGH-LINE+15%=300V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	(1) 75 V~264V/ FULL LOAD 75V~264V/ 70% LOAD (2) 107Vdc~370Vdc/FULL LOAD 107Vdc~370Vdc/70% LOAD (3) 107Vdc~370Vdc/FULL LOAD 107Vdc~370Vdc/70% LOAD TEST : OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P:80 VAC ~264 VAC O/P:FULL~MIN LOAD Ta:25°C	TEST : OK
3	INPUT CURRENT (Typ.)	230V/ 2.6A 115V/ 5.2A	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I =2.31A/ 230VAC I =4.80A/ 115VAC
4	LEAKAGE CURRENT	Earth leakage current <500uA(rms) @ 264VAC touch current <70uA(rms) @ 264VAC	I/P : 264 VAC/60HZ O/P : Min LOAD Ta : 25°C	277.6 uA / 264 VAC@ For Earth 28.2uA / 264 VAC@For Touch
5	NO LOAD CONSUMPTION	<0.5W	I/P : 240VAC O/P : NO LOAD Ta : 25°C	0.3439W

6	POWER FACTOR (Typ.)	0.94/ 230VAC 0.98/115VAC	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	PF=0.9960/230VAC PF=0.9962/115VAC
	P.F vs LOAD 			
7	EFFICIENCY(Typ.)	95%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	95.2%
	EFFICIENCY vs LOAD 			
8	INRUSH CURRENT(Typ.)	230V/80A 115V/40A COLD START	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I = 76.4A/ 230VAC I =31.8A/ 115VAC T50= 800us/230V
	INPUT=230VAC/50HZ @ FULL LOAD CH2: AC Input Voltage CH4: Input current  INPUT=115VAC/ 60HZ @ FULL LOAD CH2: AC Input Voltage CH4: Input current 			

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	105%~ 150% PROTECTION TYPE : Hiccup after 3 sec, recovers automatically after fault condition is removed	I/P: 264VAC I/P: 230VAC I/P: 115VAC O/P: TESTING Ta:25°C	143.46%/ 264VAC 143.38%/ 230VAC 143.38%/ 115VAC PROTECTION TYPE : Hiccup after 3 sec, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	59.4V~67.5V Protection type: Shut down o/p voltage, re-power on to recover	I/P: 264VAC I/P: 80VAC O/P: MIN LOAD Ta:25°C	63.0V/ 264VAC 63.6V/ 80VAC Protection type: Shut down o/p voltage, re-power on to recover
3	OVER TEMPERATURE PROTECTION	Protection type: Shut down o/p voltage, recovers automatically after temperature goes down or re-power on to recover	I/P: 264VAC I/P: 80VAC O/P: FULL LOAD	O.T.P. Active Protection type : Shut down o/p voltage, recovers automatically after temperature goes down or re-power on to recover
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE Protection type: Hiccup mode, recovers automatically after fault condition is removed	I/P: 264VAC I/P: 80VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE PROTECTION TYPE : Hiccup mode, recovers automatically after fault condition is removed

CONTROL FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	EXTERNAL FAN SUPPLY	1) 12V@0.5A for driving a fan ; tolerance -15% ~ +15% at main output 20% rated current (23CFM)	I/P: 230 VAC O/P: TESTING Ta:25°C	TEST : <u>-0.5 % ~ 0.4%</u>
2	REMOTE SENSE	S+ / S- The remote sensing compensates voltage drop on the load wiring up to 0.5V	I/P: 230 VAC O/P: FULL LOAD Ta:25°C	TEST : <u>OK</u>

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q2/ Q3 Rated: 22A/600V	AC ON/OFF I/P: High-Line +3V =267V VDS: O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz	Q2: VDS: (1) 437V (2) 465V (3) 461V (4) 437V (5) 437V (6) 437V (7) 437V (8) 449V Q3: VDS: (1) 434V (2) 466V (3) 430V (4) 434V (5) 430V (6) 426V (7) 434V (8) 438V

			(6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load (8) Peak Load Ta:25°C	
2	P.F.C Transistor (D to S) or (C to E) Peak Voltage	Q1 Rated: 34A/600V	AC ON/OFF I/P: High-Line +3V =267V VDS: O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load (8) Peak Load Ta:25°C	VDS: (1) 483V (2) 458V (3) 479V (4) 479V (5) 479V (6) 454V (7) 430V (8) 499V
3	P.F.C DIODE	D2 Rated: 6A/ 650V	I/P: High-Line +3V =267 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (4) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (5) Peak Load Ta:25°C	(1) 427V (2) 423V (3) 427V (4) 423V (5) 435V
4	Diode Peak Voltage	Q101/Q103 Rated: 12A/ 200V	AC ON/OFF I/P: High-Line +3V =267 V <u>VO=Vomax</u> O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8).NO LOAD (9) burst Mode (10) Peak Load <u>VO=Vnormal</u>	Q101: <u>VO=Vomax</u> VDS: (1) 140V (2) 140V (3) 141V (4) 140V (5) 141V (6) 144V (7) 136V (8) 133V (9) 133V (10) 146V <u>VO=Vnormal</u> (1) 132V Q103: <u>VO=Vomax</u> VDS: (1) 143V (2) 143V (3) 143V (4) 143V (5) 143V (6) 145V (7) 135V (8) 134V (9) 135V (10) 147V <u>VO=Vnormal</u> (1) 135V

			O/P: (1) Full Load Ta:25°C	
5	Input Capacitor Voltage	C5 Rated: 270μ / 420V surge: 470V	I/P: High-Line +3V =267V O/P: (1)Full Load input on/off (2) Min load input on /Off (3) Full Load /Min load Change (4) Full load continue Ta:25°C	(1) 414V (2) 402V (3) 418V (4) 414V
6	Control IC Voltage Test	PFC /PWM IC U1: Rated : 10.4V~28.7 V O/P IC U101 Rated : 4.75V~38 V IC U103 Rated : 2V~ 7V	AC ON/OFF I/P: High-Line +3V =267 V O/P: (1) FULL LOAD (2) Output Short (3) O.L.P (4) O.V.P. (5) NO LOAD VRmin (LOW LINE) Ta:25°C	U1 (1) 18.9V (2) 18.9V (3) 18.9V (4) 18.9V (5) 18.7V U103 (1) 5.16V (2) 5.16V (3) 5.20V (4) 5.16V (5) 5.22V U101 (1) 11.60V (2) 11.52V (3) 11.60V (4) 11.52V (5) 10.71V

■ SAFETY& E.M.C. TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 4KVAC/min I/P-FG :2KVAC/min O/P-FG:1.5KVAC/min	I/P-O/P: 4.4 KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG:1.8 KVAC/min Ta:25°C	I/P-O/P: 1.733mA I/P-FG: 2.78mA O/P-FG:0.798mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 600 VDC I/P-FG: 600 VDC O/P-FG: 600 VDC Ta:25°C	I/P-O/P:50GΩ I/P-FG:50GΩ O/P-FG:50GΩ NO DAMAGE

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	BS EN/EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	PASS
2	CONDUCTION	BS EN/EN55032(CISPR32) Class I : Class B , Class II: Class A BS EN/EN55014(CISPR32)	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab

		Class I : Class B		
3	RADIATION	BS EN/EN55032(CISPR32) Class I : Class B , Class II: Class A BS EN/EN55014(CISPR32) Class I : Class B	I/P : 230 VAC (50HZ) O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	BS EN/EN61000-4-2 ■ MEDICAL AIR : 15KV / Contact : 8KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	■ CRITERIA A
5	E.F.T	BS EN/EN61000-4-4 ■ INDUSTRY INPUT : 2KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	■ CRITERIA A
6	SURGE	IEC61000-4-5 ■ INDUSTRY L-N : 2KV L,N-PE : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	■ CRITERIA A
7	Test by certified Lab & Test Report Prepare Any contradictions of the test results, please refer to the latest EMC test report			

■ RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																									
1	TEMPERATURE RISE TEST	MODEL : LOP-500-54 1. ROOM AMBIENT BURN-IN : 2 HRS I/P : 230VAC O/P : FULL LOAD 2. HIGH AMBIENT BURN-IN : 2 HRS I/P : 230VAC O/P : FULL LOAD <table><tr><th>NO</th><th>Position</th><th>ROOM AMBIENT Ta= 25 °C NO FAN</th><th>HIGH AMBIENT Ta= 45 °C NO FAN</th><th>ROOM AMBIENT Ta= 25 °C WITH FAN</th><th>HIGH AMBIENT Ta= 50 °C WITH FAN</th></tr><tr><td>1</td><td>ZNR1</td><td>47°C</td><td>66.4°C</td><td>30°C</td><td>55.9°C</td></tr><tr><td>2</td><td>LF2</td><td>67.2°C</td><td>86.5°C</td><td>37.3°C</td><td>63.7°C</td></tr><tr><td>3</td><td>BD1</td><td>72.3°C</td><td>87.5°C</td><td>45.5°C</td><td>71.2°C</td></tr><tr><td>4</td><td>LF1</td><td>53.2°C</td><td>72.6°C</td><td>28.6°C</td><td>54.3°C</td></tr><tr><td>5</td><td>C2</td><td>59°C</td><td>79.5°C</td><td>30.7°C</td><td>56.8°C</td></tr><tr><td>6</td><td>RTH1</td><td>62.1°C</td><td>82.6°C</td><td>31.5°C</td><td>57.7°C</td></tr><tr><td>7</td><td>RY1</td><td>70.9°C</td><td>90.8°C</td><td>36.8°C</td><td>62.7°C</td></tr><tr><td>8</td><td>RTH2</td><td>63.8°C</td><td>83.4°C</td><td>40.3°C</td><td>66.2°C</td></tr><tr><td>9</td><td>C8</td><td>47.5°C</td><td>65.9°C</td><td>31.7°C</td><td>56.9°C</td></tr><tr><td>10</td><td>L100</td><td>49.8°C</td><td>71.1°C</td><td>32.1°C</td><td>57.8°C</td></tr><tr><td>11</td><td>C60</td><td>51.7°C</td><td>73.3°C</td><td>26.9°C</td><td>52.3°C</td></tr></table>				NO	Position	ROOM AMBIENT Ta= 25 °C NO FAN	HIGH AMBIENT Ta= 45 °C NO FAN	ROOM AMBIENT Ta= 25 °C WITH FAN	HIGH AMBIENT Ta= 50 °C WITH FAN	1	ZNR1	47°C	66.4°C	30°C	55.9°C	2	LF2	67.2°C	86.5°C	37.3°C	63.7°C	3	BD1	72.3°C	87.5°C	45.5°C	71.2°C	4	LF1	53.2°C	72.6°C	28.6°C	54.3°C	5	C2	59°C	79.5°C	30.7°C	56.8°C	6	RTH1	62.1°C	82.6°C	31.5°C	57.7°C	7	RY1	70.9°C	90.8°C	36.8°C	62.7°C	8	RTH2	63.8°C	83.4°C	40.3°C	66.2°C	9	C8	47.5°C	65.9°C	31.7°C	56.9°C	10	L100	49.8°C	71.1°C	32.1°C	57.8°C	11	C60	51.7°C	73.3°C	26.9°C	52.3°C
NO	Position	ROOM AMBIENT Ta= 25 °C NO FAN	HIGH AMBIENT Ta= 45 °C NO FAN	ROOM AMBIENT Ta= 25 °C WITH FAN	HIGH AMBIENT Ta= 50 °C WITH FAN																																																																								
1	ZNR1	47°C	66.4°C	30°C	55.9°C																																																																								
2	LF2	67.2°C	86.5°C	37.3°C	63.7°C																																																																								
3	BD1	72.3°C	87.5°C	45.5°C	71.2°C																																																																								
4	LF1	53.2°C	72.6°C	28.6°C	54.3°C																																																																								
5	C2	59°C	79.5°C	30.7°C	56.8°C																																																																								
6	RTH1	62.1°C	82.6°C	31.5°C	57.7°C																																																																								
7	RY1	70.9°C	90.8°C	36.8°C	62.7°C																																																																								
8	RTH2	63.8°C	83.4°C	40.3°C	66.2°C																																																																								
9	C8	47.5°C	65.9°C	31.7°C	56.9°C																																																																								
10	L100	49.8°C	71.1°C	32.1°C	57.8°C																																																																								
11	C60	51.7°C	73.3°C	26.9°C	52.3°C																																																																								

NO	Position	ROOM AMBIENT	HIGH AMBIENT	ROOM AMBIENT	HIGH AMBIENT
		Ta= 25 °C NO FAN	Ta= 45 °C NO FAN	Ta= 25 °C WITH FAN	Ta= 50 °C WITH FAN
12	T1 Coil	89.3°C	110.1°C	46.6°C	73.1°C
13	T1 Core	75.7°C	97.6°C	44.4°C	71.3°C
14	D2	67.5°C	90.6°C	49.5°C	75.6°C
15	Q1	68.9°C	93.4°C	47.1°C	73.6°C
16	Q3	72°C	92°C	46°C	72.8°C
17	Q2	70.2°C	90°C	45.4°C	72°C
18	U1	66.5°C	86.6°C	43.4°C	69.3°C
19	C5	56.3°C	76.6°C	38°C	62.8°C
20	D103	72.3°C	92.6°C	39.4°C	65.9°C
21	C120	66.4°C	86.8°C	38.1°C	64.6°C
22	C104	58.7°C	80°C	35.2°C	61.6°C
23	Q103	78.7°C	101°C	47.5°C	76.4°C
24	Q102	75.7°C	97.4°C	44.1°C	72.4°C
25	C102	54.5°C	76.7°C	31.4°C	57.6°C
26	C103	55.8°C	76.5°C	31.3°C	57.3°C
27	L1	69.5°C	89.4°C	45.3°C	71.1°C
28	R3	69.1°C	88.5°C	41°C	66.8°C
29	D1	57.7°C	77.9°C	33.1°C	58.9°C
30	U103	52.2°C	71.6°C	34.5°C	60.1°C
31	U101	80.5°C	100.2°C	35.4°C	62°C
32	RG100	53.1°C	73°C	42.3°C	67.6°C
33	U3	58.7°C	78.2°C	34°C	59.5°C
34	D105	58.6°C	78.7°C	38°C	63.3°C
35	D20	66.2°C	87.5°C	29°C	54.5°C
36	R122	57.8°C	78.1°C	39°C	64.4°C
37	R100	81.3°C	102.3°C	47°C	73.7°C
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)		I/P : 230 VAC O/P : 130.2%LOAD Ta : 25°C	TEST : OK
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR		I/P : 264VAC/115VAC O/P : 100%LOAD Ta= -45°C	TEST : OK
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50 °C/95 %R.H NO DAMAGE		I/P : 272 VAC O/P : FULL LOAD Ta= 50 °C HUMIDITY= 95 %R.H	TEST : OK
5	TEMPERATURE COEFFICIENT	± 0.03%/°C(0~50°C)		I/P : 230 VAC O/P : FULL LOAD	±0.008%/°C(0~50°C)
6	STORAGE TEMPERATURE TEST	-40~85°C		1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/output condition : STATIC	

7	THERMAL SHOCK TEST	-40~50°C	1. Thermal shock Temperature : -45°C~ +55°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/output condition : 15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle:230V/ FULL LOAD Burn In Test	
8	VIBRATION TEST	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 12min/sweep cycle (4) Acceleration : 3G (5) Test Time : 180min in each axis (X.Y.Z) (6) Ta : 25°C	
9	CAPACITOR LIFE CYCLE	SUPPOSE C102 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 45 °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 45 °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 45 °C LIFE TIME		(1) 474273.6 HRS (NO FAN) (2) 101798.7 HRS (NO FAN) (3) 187804.9 HRS (NO FAN) (4) 248951.8 HRS (NO FAN)
		SUPPOSE C102 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 50 °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 50 °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 50 °C LIFE TIME		(5) 2223522.8 HRS (WITH FAN) (6) 310539.2 HRS (WITH FAN) (7) 421234.4 HRS (WITH FAN) (8) 487810.9 HRS (WITH FAN)
10	MTBF	Conducted by Parts Stress Analysis Prediction 1695.7K hrs min. Telcordia SR-332 (Bellcore) ; 230.7K hrs min. MIL-HDBK-217F (25°C)		
11	Ongoing Reliability Test	I/P : 230VAC O/P : FULL LOAD TA=50°C Demonstration Mean Time Between Failure : 30,000 hours		

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	Yuwei	Liutt	Wangdz

2020.10.1 TAG-QA-009