



Test Report: XDR-75E-48

75W AC/DC Economical Ultra Slim Industrial DIN Rail
Power

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Control Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

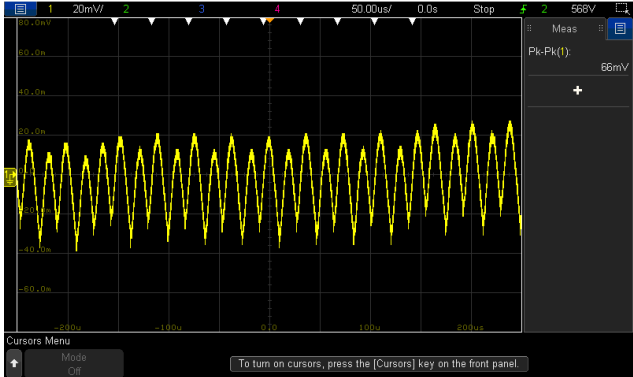
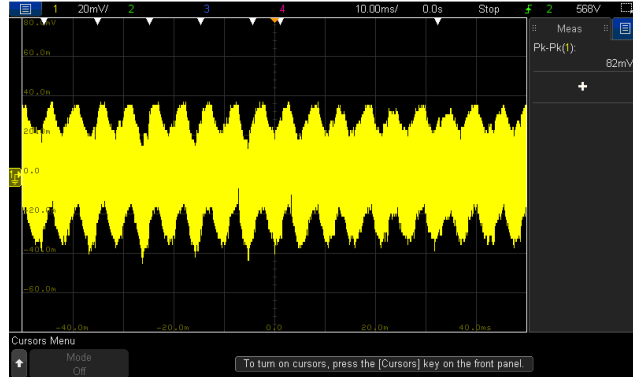
E.M.C. Test

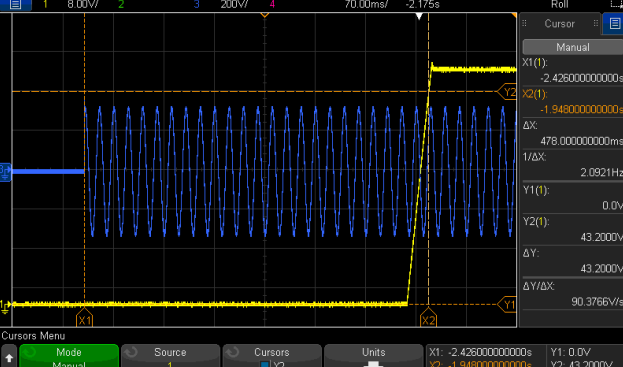
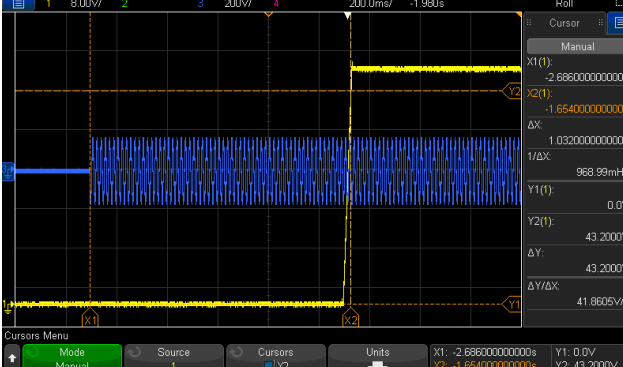
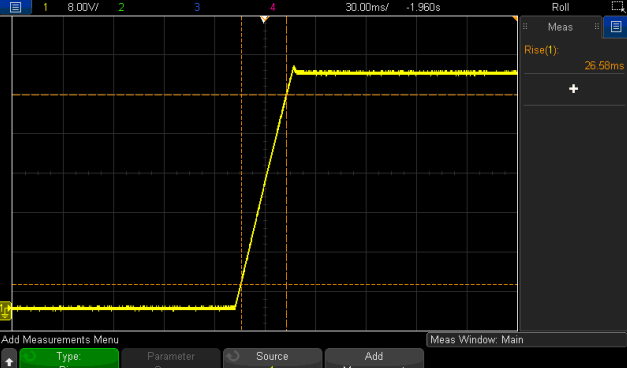
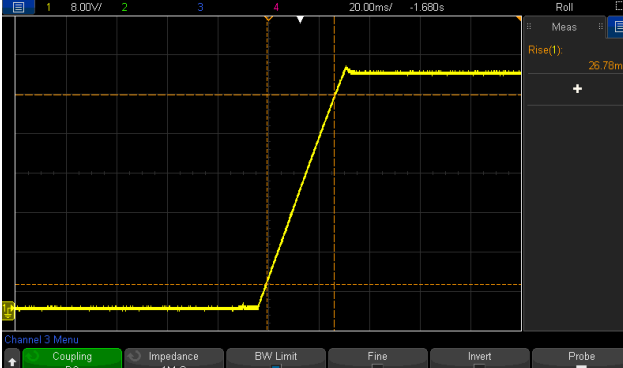
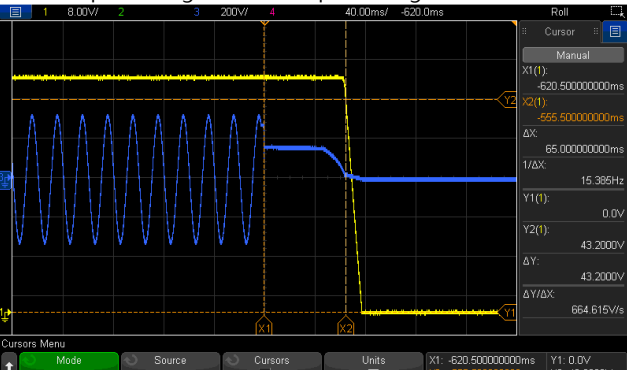
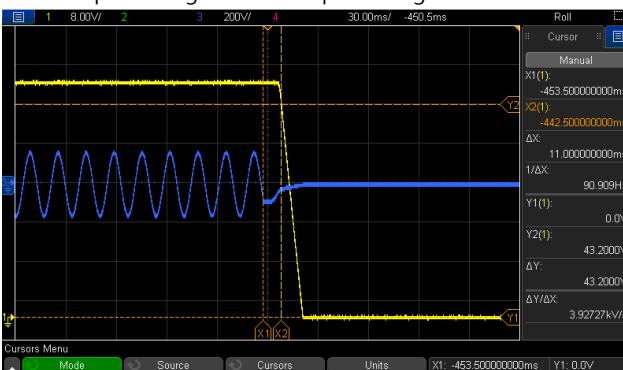
■ RELIABILITY TEST

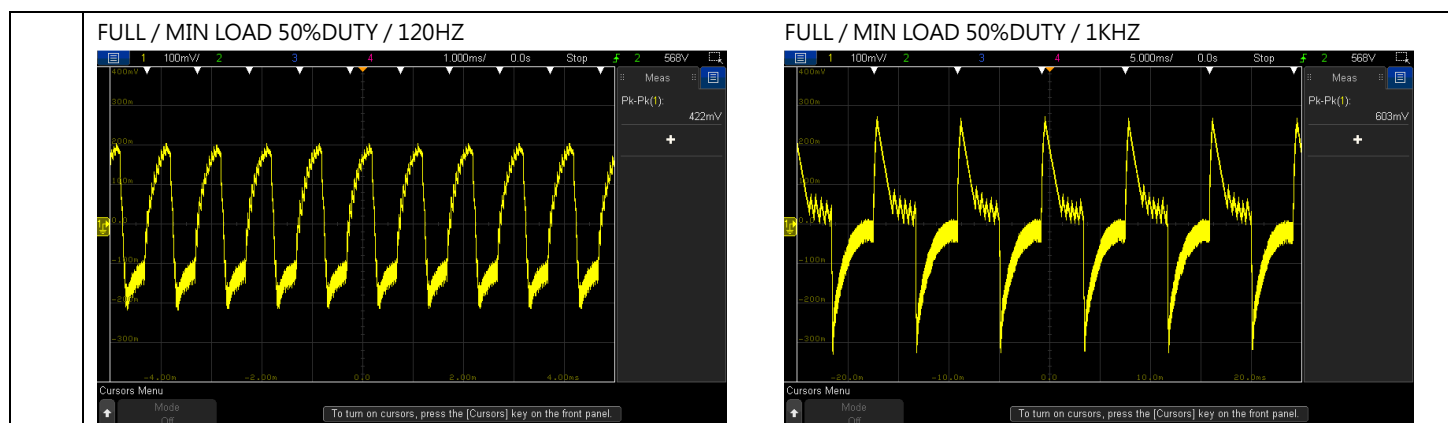
ENVIRONMENT TEST

■ DESIGN VERIFY TEST


OUTPUT FUNCTION TEST

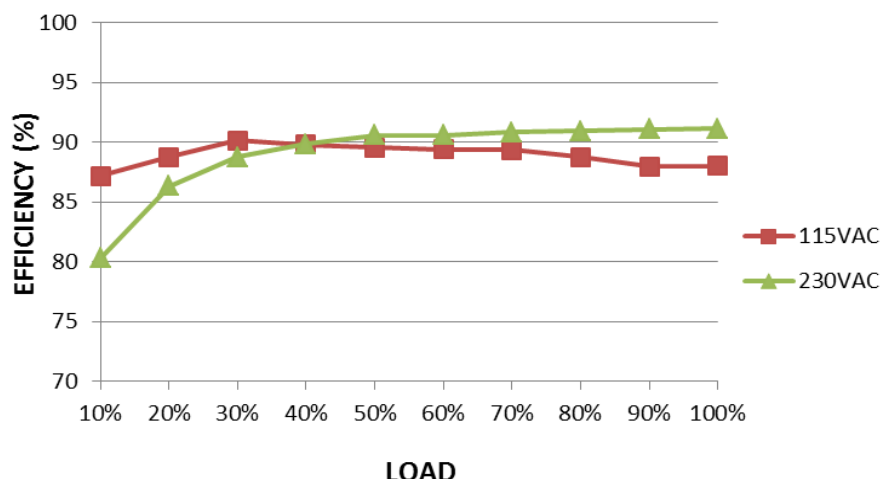
NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 48V~ 55V	I/P : 230 VAC I/P : 115 VAC O/P : MIN LOAD Ta : 25°C	46.48V~57.17V/230VAC 46.48V~57.17V/115VAC
2	OUTPUT VOLTAGE TOLERANCE	V1: -1.0 %~ +1.0%	I/P: 85VAC~ 264VAC O/P:FULL~ MIN. LOAD Ta:25°C	V1: -0.04% ~ 0.04%
3	LINE REGULATION	V1: -0.5 %~ +0.5%	I/P: 85VAC~ 264VAC O/P:FULL LOAD Ta:25°C	V1: 0 % ~ 0%
4	LOAD REGULATION	V1: -1.0 %~ +1.0%	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25°C	V1: -0.04% ~ 0.04%
5	OVER/UNDERSHOOT TEST	<± 5%	I/P: 230VAC O/P:FULL LOAD / NO LOAD Ta:25°C	1.85%
6	RIPPLE & NOISE (Max)	V1: 120mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25°C	V1: 66mVp-p / high frequency 82mVp-p / low frequency
high frequency :				
low frequency :				
7	SET UP TIME (Max)	230VAC/1200ms 115VAC/2500ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 478ms 115VAC/ 1032ms
INPUT=230VAC/50HZ @ FULL LOAD CH1: Output Voltage CH3: AC Input Voltage		INPUT=115VAC/60HZ @ FULL LOAD CH1: Output Voltage CH3: AC Input Voltage		

				
8	RISE TIME (Max)	230VAC/60ms 115VAC/60ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 26.58ms 115VAC/ 26.78ms
INPUT=230VAC/50HZ @ FULL LOAD CH1: Output Voltage				
				
INPUT=115VAC/60HZ @ FULL LOAD CH1: Output Voltage				
				
9	HOLD UP TIME (Typ.)	230VAC/ 16ms 115VAC/ 10ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 65.0ms 115VAC/ 11.0ms
INPUT=230VAC/50HZ @ FULL LOAD CH1: Output Voltage CH3: AC Input Voltage				
				
INPUT=115VAC/60HZ @ FULL LOAD CH1: Output Voltage CH3: AC Input Voltage				
				
10	DYNAMIC LOAD	V1: 4800mVp-p	I/P: 230VAC O/P: (1) FULL/ MIN LOAD 50%DUTY / 120HZ (2) FULL/ MIN LOAD 50%DUTY / 1KHZ Ta:25°C	422mVp-p 603mVp-p



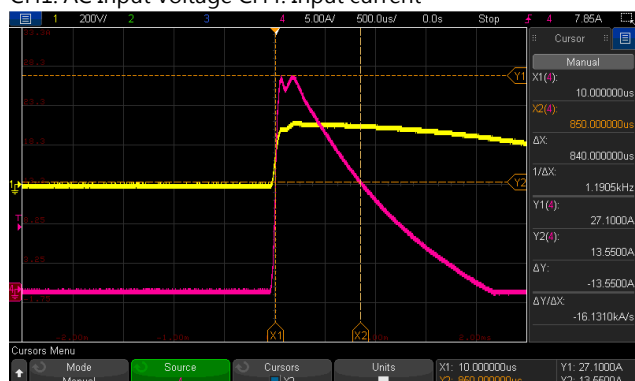
INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	85VAC~264VAC 120VDC~ 370VDC 	(1) I/P: TESTING O/P: FULL / 75% LOAD (2) I/P: DC TESTING (L: + N: -) O/P: FULL / 75% LOAD (3) I/P: DC TESTING (L: - N: +) O/P: FULL / 75% LOAD Ta:25°C I/P: HIGH-LINE+15%=300V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	(1) 80.3V~264V/ FULL LOAD 66.4V~264V/ 75% LOAD (2) 91Vdc~370Vdc/FULL LOAD 89Vdc~370Vdc/75% LOAD (3) 91Vdc~370Vdc/FULL LOAD 89Vdc~370Vdc/75% LOAD TEST : OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P:85VAC ~264 VAC O/P:FULL~MIN LOAD Ta:25°C	TEST : OK
3	INPUT CURRENT (Typ.)	230V/ 0.8A 115V/ 1.4A	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I =0.764A/ 230VAC I =1.308A/ 115VAC
4	LEAKAGE CURRENT	< 1mA / 240 VAC	I/P : 240 VAC/60HZ O/P : Min LOAD Ta : 25°C	0.65mA
5	NO LOAD CONSUMPTION	< 1W	I/P : 230VAC I/P : 115VAC O/P : NO LOAD Ta : 25°C	0.79W/ 230VAC 0.58W/ 115VAC
6	EFFICIENCY(Typ.)	91%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	91.1%
	EFFICIENCY vs LOAD			

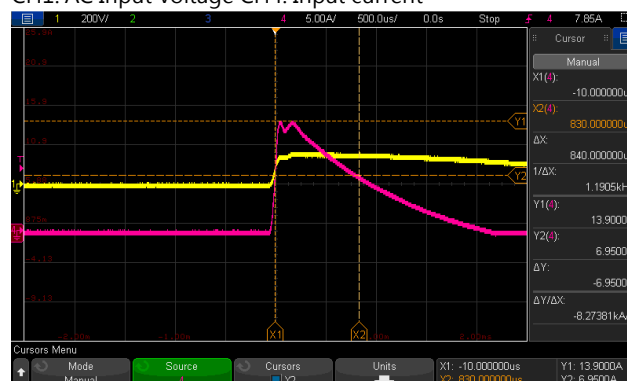


7	INRUSH CURRENT(Typ.)	230V/35A 115V/18A COLD START	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I =27.1A/ 230VAC I =13.9A/ 115VAC T50= 1840us/230V
---	----------------------	------------------------------------	--	--

INPUT=230VAC/50HZ @ FULL LOAD
CH1: AC Input Voltage CH4: Input current



INPUT=115VAC/ 60HZ @ FULL LOAD
CH1: AC Input Voltage CH4: Input current



PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	105%~130% rated output power Protection type: Constant current limiting without shutdown, recovers automatically after fault condition is removed	I/P: 264VAC I/P: 230VAC I/P: 100VAC O/P: TESTING Ta:25°C	120.6%/ 264VAC 120.6%/ 230VAC 120.6%/ 100VAC PROTECTION TYPE : Constant current limiting without shutdown, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	56V~65V Protection type: Shut down o/p voltage, re-power on to recover	I/P: 264VAC I/P: 85VAC O/P: MIN LOAD Ta:25°C	59.2V/ 264VAC 59.2V/ 85VAC PROTECTION TYPE : Shut down o/p voltage, re-power on to recover

3	OVER TEMPERATURE PROTECTION	Protection type: Hiccup mode, recovers automatically after fault condition is removed	I/P: 264VAC I/P: 85VAC O/P: FULL LOAD	O.T.P. Active Protection type : Hiccup mode, recovers automatically after fault condition is removed
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE Protection type: Constant current limiting, recovers automatically after fault condition is removed	I/P: 264VAC I/P: 85VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE PROTECTION TYPE : Constant current limiting, recovers automatically after fault condition is removed

CONTROL FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	DC OK CONTACT RATINGS	30VDC/1A 30VAC/0.5A RESISTIVE LOAD	I/P:230VAC O/P:FULL LOAD Ta:25°C	TEST: <u>OK</u>

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q1 : STF13N65M2 Rated : 10A/650V	AC ON/OFF I/P: High-Line +3V =267V VDS: O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load Ta:25°C	VDS: (1) 552V (2) 548V (3) 552V (4) 552V (5) 556V (6) 552V (7) 552V
2	Diode Peak Voltage	Q100 : Rated : 10A/ 300V	AC ON/OFF I/P: High-Line +3V =267 V <u>Vo=Vomax</u> O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz	<u>Vo=Vomax</u> (1) 252V (2) 254V (3) 254V (4) 252V (5) 252V (6) 254V

			(4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7) 0%→400% Load. (8).NO LOAD <u>Vo=Vonormal</u> O/P: (1) Full Load Ta:25°C	(7) 254V (8) 254V <u>Vo=Vonormal</u> (1) 244V
3	Input Capacitor Voltage	C5 Rated: 120μ / 400V	I/P: High-Line +3V =267V O/P: (1)Full Load input on/off (2) Min load input on /Off (3) Full Load /Min load Change (4) Full load continue Ta:25°C	(1) 376V (2) 376V (3) 376V (4) 372V
4	Control IC Voltage Test	PWM IC U1: Rated : 8V~ 26.5V IC U107 : Rated : 3V~30V	AC ON/OFF I/P: High-Line +3V =267 V O/P: (1) FULL LOAD (2) Output Short (3) O.L.P (4) O.V.P. (5) NO LOAD VRmin (LOW LINE) Ta:25°C	U1 (1) 16.6V (2) 16.6V (3) 16.6V (4) 16.6V (5) 10.6V U107 (1) 9.8V (2) 9.8V (3) 9.8V (4) 9.8V (5) 8.6V
5	Clamp Diode Peak Voltage	D5 : Rated : 620V/1A	AC ON/OFF I/P : High-Line +3V = 267 V O/P : (1) Dynamic Load 90%Duty/1KHz (2) Full load continue Ta : 25°C	(1) 466V (2) 462V

■ SAFETY& E.M.C. TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 4 K VAC/min I/P-FG : 2 K VAC/min O/P-FG: 1.5 KVAC/min O/P-DC OK: 0.5 KVAC/min	I/P-O/P: 4.4 KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG: 1.8 KVAC/min O/P-DC OK: 0.6 KVAC/min Ta:25°C	I/P - O/P: 4.22 mA I/P - F G : 3.03 mA O/P - F G : 2.82 mA O/P-DC OK: 0.007 mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P: 500 VDC>100MΩ O/P-FG: 500 VDC>100MΩ I/P - F G : 500 VDC >100MΩ	I/P-O/P: 600 VDC I/P - F G : 600 VDC O/P-FG: 600 VDC Ta:25°C	I/P - O/P: 50 GΩ I/P - F G : 50 GΩ O/P - F G : 50 GΩ NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40A / 2min Ta:25°C	6mΩ

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	BS EN/EN61000-3-2 ■ CLASS A	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	■ PASS □ FAIL
2	CONDUCTION	BS EN/EN55032 (CISPR32) / CNS15936 CLASS B	I/P : 230 VAC (50HZ)/115 VAC (60HZ) O/P: FULL/50% LOAD/10% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	BS EN/EN55032 (CISPR32) / CNS15936 CLASS B	I/P : 230 VAC (50HZ)/115 VAC (60HZ) O/P: FULL/50% LOAD/10% LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	BS EN/EN61000-4-2 AIR : 8KV / Contact : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	■ CRITERIA A □ CRITERIA B
5	E.F.T	BS EN/EN61000-4-4 INPUT : 2KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	■ CRITERIA A □ CRITERIA B
6	SURGE	BS EN/EN61000-4-5 2KV/Line-Line 4KV/Line-Line-Chassis	I/P : 230 VAC/50HZ O/P : MIN/FULL LOAD D Ta : 25°C	■ CRITERIA A □ CRITERIA B
7	Test by certified Lab & Test Report Prepare Any contradictions of the test results, please refer to the latest EMC test report			

■ RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																																																																												
1	TEMPERATURE RISE TEST	MODEL : XDR-75E-24 1. ROOM AMBIENT BURN-IN : 2 HRS I/P : 230VAC O/P : FULL LOAD Ta=27.9°C 2. HIGH AMBIENT BURN-IN : 2 HRS I/P : 230VAC O/P : FULL LOAD Ta=50.1°C <table><tr><th>NO</th><th>Position</th><th>ROOM AMBIENT Ta=27.9°C</th><th>HIGH AMBIENT Ta=50.1°C</th></tr><tr><td>1</td><td>C1</td><td>39.6°C</td><td>61.4°C</td></tr><tr><td>2</td><td>ZNR1</td><td>39.0°C</td><td>61.1°C</td></tr><tr><td>3</td><td>LF2</td><td>46.1°C</td><td>67.5°C</td></tr><tr><td>4</td><td>R10</td><td>63.9°C</td><td>80.7°C</td></tr><tr><td>5</td><td>RTH1</td><td>72.2°C</td><td>87.0°C</td></tr><tr><td>6</td><td>Q101</td><td>68.6°C</td><td>88.7°C</td></tr><tr><td>7</td><td>D200</td><td>64.1°C</td><td>84.3°C</td></tr><tr><td>8</td><td>D5</td><td>66.0°C</td><td>86.8°C</td></tr><tr><td>9</td><td>Q200</td><td>65.3°C</td><td>85.4°C</td></tr><tr><td>10</td><td>D30</td><td>68.0°C</td><td>87.9°C</td></tr><tr><td>11</td><td>BD1</td><td>56.7°C</td><td>76.6°C</td></tr><tr><td>12</td><td>C5</td><td>45.7°C</td><td>66.7°C</td></tr><tr><td>13</td><td>Q1</td><td>51.5°C</td><td>73.3°C</td></tr><tr><td>14</td><td>R50</td><td>56.5°C</td><td>77.5°C</td></tr><tr><td>15</td><td>C200</td><td>57.6°C</td><td>78.2°C</td></tr><tr><td>16</td><td>T1 初级</td><td>66.6°C</td><td>87.2°C</td></tr><tr><td>17</td><td>T1 次级</td><td>68.4°C</td><td>88.7°C</td></tr><tr><td>18</td><td>T1 磁芯</td><td>65.4°C</td><td>85.7°C</td></tr><tr><td>19</td><td>C106</td><td>55.9°C</td><td>76.5°C</td></tr><tr><td>20</td><td>C108</td><td>51.8°C</td><td>72.9°C</td></tr><tr><td>21</td><td>LF100</td><td>44.5°C</td><td>65.9°C</td></tr><tr><td>22</td><td>RTH2</td><td>58.6°C</td><td>79.8°C</td></tr><tr><td>23</td><td>C115</td><td>43.2°C</td><td>64.5°C</td></tr><tr><td>24</td><td>J110</td><td>59.5°C</td><td>80.2°C</td></tr><tr><td>25</td><td>RY10</td><td>46.0°C</td><td>67.4°C</td></tr><tr><td>26</td><td>U3</td><td>47.8°C</td><td>68.8°C</td></tr><tr><td>27</td><td>U107</td><td>53.1°C</td><td>74.0°C</td></tr><tr><td>28</td><td>U1</td><td>47.1°C</td><td>68.5°C</td></tr><tr><td>29</td><td>D51</td><td>46.0°C</td><td>67.1°C</td></tr><tr><td>30</td><td>D133</td><td>49.0°C</td><td>70.0°C</td></tr></table>			NO	Position	ROOM AMBIENT Ta=27.9°C	HIGH AMBIENT Ta=50.1°C	1	C1	39.6°C	61.4°C	2	ZNR1	39.0°C	61.1°C	3	LF2	46.1°C	67.5°C	4	R10	63.9°C	80.7°C	5	RTH1	72.2°C	87.0°C	6	Q101	68.6°C	88.7°C	7	D200	64.1°C	84.3°C	8	D5	66.0°C	86.8°C	9	Q200	65.3°C	85.4°C	10	D30	68.0°C	87.9°C	11	BD1	56.7°C	76.6°C	12	C5	45.7°C	66.7°C	13	Q1	51.5°C	73.3°C	14	R50	56.5°C	77.5°C	15	C200	57.6°C	78.2°C	16	T1 初级	66.6°C	87.2°C	17	T1 次级	68.4°C	88.7°C	18	T1 磁芯	65.4°C	85.7°C	19	C106	55.9°C	76.5°C	20	C108	51.8°C	72.9°C	21	LF100	44.5°C	65.9°C	22	RTH2	58.6°C	79.8°C	23	C115	43.2°C	64.5°C	24	J110	59.5°C	80.2°C	25	RY10	46.0°C	67.4°C	26	U3	47.8°C	68.8°C	27	U107	53.1°C	74.0°C	28	U1	47.1°C	68.5°C	29	D51	46.0°C	67.1°C	30	D133	49.0°C	70.0°C
NO	Position	ROOM AMBIENT Ta=27.9°C	HIGH AMBIENT Ta=50.1°C																																																																																																																													
1	C1	39.6°C	61.4°C																																																																																																																													
2	ZNR1	39.0°C	61.1°C																																																																																																																													
3	LF2	46.1°C	67.5°C																																																																																																																													
4	R10	63.9°C	80.7°C																																																																																																																													
5	RTH1	72.2°C	87.0°C																																																																																																																													
6	Q101	68.6°C	88.7°C																																																																																																																													
7	D200	64.1°C	84.3°C																																																																																																																													
8	D5	66.0°C	86.8°C																																																																																																																													
9	Q200	65.3°C	85.4°C																																																																																																																													
10	D30	68.0°C	87.9°C																																																																																																																													
11	BD1	56.7°C	76.6°C																																																																																																																													
12	C5	45.7°C	66.7°C																																																																																																																													
13	Q1	51.5°C	73.3°C																																																																																																																													
14	R50	56.5°C	77.5°C																																																																																																																													
15	C200	57.6°C	78.2°C																																																																																																																													
16	T1 初级	66.6°C	87.2°C																																																																																																																													
17	T1 次级	68.4°C	88.7°C																																																																																																																													
18	T1 磁芯	65.4°C	85.7°C																																																																																																																													
19	C106	55.9°C	76.5°C																																																																																																																													
20	C108	51.8°C	72.9°C																																																																																																																													
21	LF100	44.5°C	65.9°C																																																																																																																													
22	RTH2	58.6°C	79.8°C																																																																																																																													
23	C115	43.2°C	64.5°C																																																																																																																													
24	J110	59.5°C	80.2°C																																																																																																																													
25	RY10	46.0°C	67.4°C																																																																																																																													
26	U3	47.8°C	68.8°C																																																																																																																													
27	U107	53.1°C	74.0°C																																																																																																																													
28	U1	47.1°C	68.5°C																																																																																																																													
29	D51	46.0°C	67.1°C																																																																																																																													
30	D133	49.0°C	70.0°C																																																																																																																													
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 230 VAC O/P : 120%LOAD Ta : 25°C	TEST : OK																																																																																																																												

3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 264VAC/100VAC O/P : 100 %LOAD@-30 °C 50%LOAD@-40 °C	TEST : OK
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50°C/95 %R.H NO DAMAGE	I/P : 272 VAC O/P : FULL LOAD Ta= 50°C HUMIDITY= 95 %R.H	TEST : OK
5	TEMPERATURE COEFFICIENT	±0.03%/°C(0~50°C)	I/P : 230 VAC O/P : FULL LOAD	0.0053%/°C(0~50°C)
6	STORAGE TEMPERATURE TEST	-40~85°C	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : STATIC	
7	THERMAL SHOCK TEST	-40~50°C	1. Thermal shock Temperature : -45°C~ +55°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/Output condition : 15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle:230V/ FULL LOAD Burn In Test	
8	VIBRATION TEST	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 10min/sweep cycle (4) Acceleration : 3G (5) Test Time : 180min in each axis (X.Y.Z) (6) Ta : 25°C	
9	CAPACITOR LIFE CYCLE	SUPPOSE C106 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 50 °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 50 °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 50 °C LIFE TIME		(1) 384128.3HRS (2) 73794.7HRS (3) 97594.1HRS (4) 132611.3HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 2425.7K hrs min. Telcordia SR-332 (Bellcore) ; 533.7K hrs min. MIL-HDBK-217F (25°C)		
11	Ongoing Reliability Test	I/P : 230VAC O/P : FULL LOAD TA=50°C Demonstration Mean Time Between Failure : 30,000 hours		

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	Yuwei	Liutt	Wangzd

2020.10.1 TAG-QA-009